

# USB-C<sup>™</sup> Pro Multiport Hub 14 Port



2x 4K HDMI, 1x VGA Video Connection Verbatim



USB 3.2 Gen2 1x USB-A, 2x USB-C

RJ45 Gigabit Ethernet Port



SD/microSD Slot

### No more limits for your laptop

Introducing the USB-C Pro Multiport Hub 9 Port CMH-14, a connectivity powerhouse for streamlined productivity. Unleash enhanced connectivity by converting a single USB-C port into nine versatile ports, including USB 3.2 Gen2 and HDMI.

Swift data transfer is at your fingertips with USB 3.2 Gen2 technology, ensuring efficient workflows and minimal wait times. Immerse yourself in crisp 8K video output through the HDMI port, ideal for presentations, movie watching, or expanding your workspace with crystal-clear visuals. Do you need a card reader too? Well this Hub comes with card reader slots for both SD and microSD memory cards.


Plug the Hub into the USB-C<sup>™</sup> port on your laptop to immediately increase your working possibilities.



## **USB-C<sup>™</sup> Pro Multiport Hub** 14 Port

CMH-14

General Information				
Material	Aluminum+ABS			
Colour	Silver			
Interfaces				
Host Connection	USB-C <sup>™</sup> 3.2 Gen1 with up to 85W power pass-through			
Cable length	15 cm			
Video Ports	HDMI 1: up to 4K@60Hz (3840x2160) (work separately while source is DP1.4), up to 4K@30Hz (3840x2160) (work separately while source is DP1.2) HDMI 2: up to 4K@30Hz (3840x2160)			
Audio	3.5mm Audio & Microphone (CTIA Standard)			
SD/microSD Slot	Read: up to 104MB/s, Write: up to 80MB/s (Data transfer rate are subject to the speed of the memory card itself and your computer's USB ports)			
Ethernet Port	1x RJ45 Gigabit Ethernet up to 1Gb/s			
USB-A ports	2x USB-A 2.0, up to 480Mbps data speed. Designed for the connection of 2.4 GHz wireless devices, such as wireless keyboards/mouse adapters etc.			
	3x USB-A 3.2 Gen1, up to 5Gb/s data speed & maximum power output 5V/0.9A, backwards compatible with USB 2.0.			
USB-C ports	<ul> <li>1x USB-C 3.2 Gen1 for Data Transfer, up to 5Gb/s data speed &amp; maximum power output 5V/0.9A.</li> <li>1x USB-C PD charging port: Power Delivery (PD 3.2 Gen1), up to 100W upstream charging the source devices such as USB-C Laptop/MacBook.</li> </ul>			
Other Features				
Certificates	EAC/CE/UKCA/FCC			
ROHS/REACH compliance	Yes			
Storage and Operating	Conditions			
Operating Temperature	0°C ~ +40°C			
Storage Temperature	-20°C ~ +70°C			
Operating Humidity	10% ~ 85% RH (no condensation)			

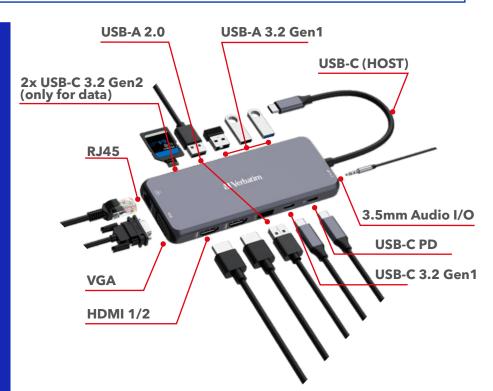

www.verbatim.com

## USB-C<sup>™</sup> Pro Multiport Hub 14 Port

CMH-14



PN	Description	Bar Code	EAN128 Code	EAN14 Code	
32154	USB-C Pro Multiport Hub 14 Port CMH-14	023942321545	(02)00023942321545(37)10(91)891 (02)00023942321545(37)40(91)891	20023942321549 50023942321540	
Logis	tic Information				
Product Dimensions L x W x H		140 x 55.4 x 15mm			
Product Weight		125 grams			
Units per Pack		1			
Pack Dimensions L x W x H		200 x 100 x 22mm			
Pack Weight		186			
Units per Inner Carton		10			
Inner Carton Dimensions L x W x H		415 x 112 x 130mm			
Inner Carton Weight		2010			
Units per Outer Carton		40			
Outer Carton Dimensions L x W x H		435 x 245 x 290mm			
Master Cartons Weight		8600			
Master Cartons per Layer		8			
Layers per Pallet		3			
Units per Pallet		960			

### USB-C<sup>™</sup> Pro Multiport Hub 14 Port CMH-14



Front Angled



Left Side Angled



Top Angled



Right Side Angled Lit



Packaging flat



Lifestyle 2



Back Angled



**Right Side Angled** 



Ports







Lifestyle 1



Lifestyle 3



#### System Requirements:

- Interface: USB-C must support video output.
- OS: Windows OS 7/8/10/11 (X86/ X64), Mac OS 10.2 Above, Chrome OS, Linux, Android 7 or above

#### Pack Contents:

- USB-C Pro Multiport Hub
- Quick Start Guide

Publication date: 01-12-2023 © 2023 Verbatim. All rights reserved. All brand names are registered trademarks of their respective owners. Unauthorized use strictly prohibited. Specifications are subject to change without prior notice.