




H610M-HVS/ M.2 D5 Gen5

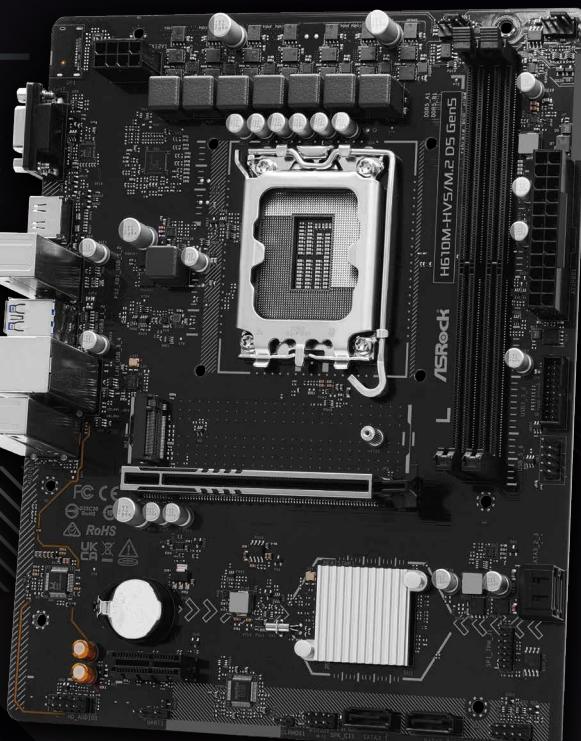


PRODUCT BRIEF :

- Supports 14th, 13th & 12th Gen Intel® Core™ Processors (LGA1700)
- 6+1+1 Power Phase
- 2 x DDR5 DIMMs
- Supports Dual Channel, up to 5600
- 1 PCIe 5.0 x16, 1 PCIe 3.0 x1
- Graphics Output Options: 1 HDMI, 1 D-Sub
- Realtek ALC897 7.1 CH HD Audio Codec
- 1 Ultra M.2 (PCIe Gen3 x4)
- 4 SATA3
- 4 USB 3.2 Gen1 (2 Rear, 2 Front)
- 6 USB 2.0 (4 Rear, 2 Front)
- Realtek Gigabit LAN

**I/O OVERVIEW**

6+1+1 Power Phase

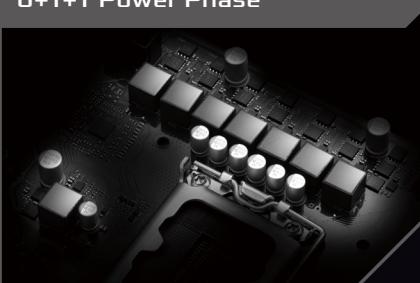

Ultra M.2 (PCIe Gen3 x4)



PCIe Gen5 x16 (Reinforced Steel Slot)



Dual Graphics Outputs



Auto Driver Installer



Realtek Gigabit LAN



Detail Specification

Platform	<ul style="list-style-type: none">- Micro ATX Form Factor: 9.6-in x 7.6-in, 24.4 cm x 19.3 cm- Solid Capacitor design	Rear Panel I/O	<ul style="list-style-type: none">- 1 x PS/2 Mouse/Keyboard Port- 1 x D-Sub Port- 1 x HDMI Port- 2 x USB 3.2 Gen1 Ports- 4 x USB 2.0 Ports- 1 x RJ-45 LAN Port- HD Audio Jacks: Line in / Front Speaker / Microphone
Unique Feature	<ul style="list-style-type: none">Superb Productivity<ul style="list-style-type: none">- PCIe Gen5 (Graphics)- Dual Channel DDR5Rock-Solid Durability<ul style="list-style-type: none">- 6+1+1 Power Phase- ASRock Intel® 4-Layer Memory POOL (Planes on Outer Layers) TechnologyEZ Update<ul style="list-style-type: none">- ASRock Auto Driver Installer	Storage	<p>Chipset: - 1 x Ultra M.2 Socket (M2_1, Key M), supports type 2280 PCIe Gen3x4 (32 Gb/s) mode*</p> <p>* Supports NVMe SSD as boot disks</p>
CPU	<ul style="list-style-type: none">- Supports 14th, 13th & 12th Gen Intel® Core™ Processors (LGA1700)- Supports Intel® Hybrid Technology- Supports Intel® Turbo Boost Max 3.0 Technology	Connector	<ul style="list-style-type: none">- 1 x SPI TPM Header- 1 x Chassis Intrusion and Speaker Header- 1 x CPU Fan Connector (4-pin) (Smart Fan Speed Control)*- 1 x Chassis/Water Pump Fan Connector (4-pin) (Smart Fan Speed Control)**- 1 x 24 pin ATX Power Connector- 1 x 8 pin 12V Power Connector- 1 x Front Panel Audio Connector- 1 x USB 2.0 Header (Supports 2 USB 2.0 ports)- 1 x USB 3.2 Gen1 Header (Supports 2 USB 3.2 Gen1 ports)* CPU_FAN1 supports the fan power up to 1A (12W).** CHA_FAN1/WP supports the fan power up to 2A (24W).** CHA_FAN1/WP can auto detect if 3-pin or 4-pin fan is in use.
Chipset	<ul style="list-style-type: none">- Intel® H610	BIOS Feature	<ul style="list-style-type: none">- 128Mb AMI UEFI Legal BIOS with GUI support
Memory	<ul style="list-style-type: none">- Dual Channel DDR5 Memory Technology- 2 x DDR5 DIMM Slots- 14th and 13th Gen Intel® Core™ Processors support DDR5 non-ECC, un-buffered memory up to 5600*- 12th Gen Intel® Core™ Processors support DDR5 non-ECC, un-buffered memory up to 4800*- Max. capacity of system memory: 128GB- Supports Intel® Extreme Memory Profile (XMP) 3.0* Actual support may vary by CPU* Please refer to Memory Support List on ASRock's website for more information. (http://www.asrock.com/)	Software and UEFI	<p>Software<ul style="list-style-type: none">- ASRock Motherboard Utility (A-Tuning)</p> <p>* These utilities can be downloaded from ASRock Live Update & APP Shop.</p> <p>UEFI<ul style="list-style-type: none">- ASRock EZ Mode- ASRock Full HD UEFI- ASRock My Favorites in UEFI- ASRock Auto Driver Installer- ASRock Instant Flash</p>
Expansion Slot	<p>CPU: - 1 x PCIe 5.0 x16 Slot (PCIE1), supports x16 mode*</p> <p>Chipset: - 1 x PCIe 3.0 x1 Slot (PCIE2)*</p> <p>* Supports NVMe SSD as boot disks</p>	OS	<ul style="list-style-type: none">- Microsoft® Windows® 10 64-bit / 11 64-bit
Graphics	<ul style="list-style-type: none">* Intel® UHD Graphics Built-in Visuals and the VGA outputs can be supported only with processors which are GPU integrated.- Intel® Xe Graphics Architecture (Gen 12)- 1 x HDMI 2.1 TMDS Compatible, supports HDCP 2.3 and max. resolution up to 4K 60Hz- 1 x D-Sub, supports max. resolution up to Full HD (1920x1080) 60Hz	Certifications	<ul style="list-style-type: none">- FCC, CE- ErP/EuP ready (ErP/EuP ready power supply is required)
Audio	<ul style="list-style-type: none">- 7.1 CH HD Audio (Realtek ALC897 Audio Codec)	Accessories	<ul style="list-style-type: none">- 1 x I/O Shield- 2 x SATA Data Cables- 1 x Screw for M.2 Socket
LAN	<ul style="list-style-type: none">- Gigabit LAN 10/100/1000 Mb/s- Realtek 8111H		
USB	<p>Chipset: - 4 x USB 3.2 Gen1 (2 Rear, 2 Front) - 6 x USB 2.0 (4 Rear, 2 Front)</p>		