


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Dalle QD-OLED de 3ème génération pour des images d'une qualité incroyable
- Temps de réponse gris à gris ultrarapide de seulement 0,03 ms et taux de rafraîchissement de 240 Hz
- QD Premium Color pour assurer des couleurs qui répondent aux normes du marché, avec valeur Delta E \leq 2
- Norme VESA DisplayHDR True Black 400 pour des visuels HDR à couper le souffle
- MSI OLED Care 2.0 pour réduire les risques de brûlures de la dalle OLED
- Mode Console avec port HDMI™ 2.1 et bande passante totale de 48 Gb/s
- Pied de support réglable pour trouver la position la plus confortable pour jouer
- Garantie OLED 3 ans incluant une protection contre les problèmes de brûlures des dalles OLED

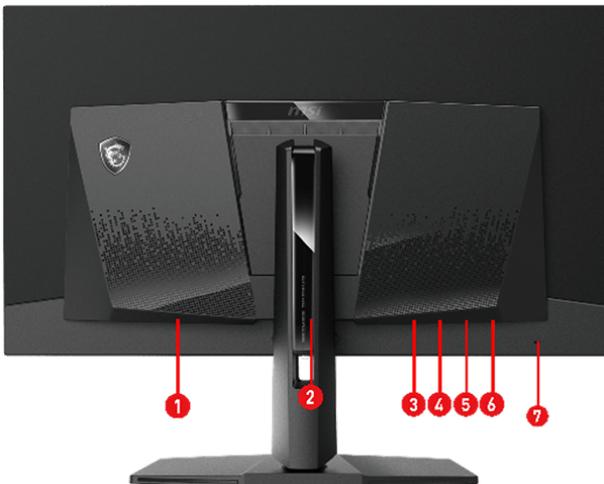

1. AC Power Jack
2. 5-way Joystick Navigator
3. 2 x HDMI™ (2.1)
4. Display Port (1.4a)
5. USB Type-C (PD 15W)
6. Earphone out
7. Kensington lock

SPECIFICATION

Modèle	SKU Number	0
	Part No	9S6-3DD39T-001
	Color	ID1/Black-Black
	MKT Name	MAG 321UPX QD-OLED
	MKT Spec	MAG 321UPX QD-OLED
	Model	3DD3
Affichage	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	699.48(H) x 394.73(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.1814(H)x0.1814(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	30~566 KHz(H) / 48~240 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120.5%/93.8%
	NTSC (CIE1931 area percentage/overlap)	103.6%/91.5%
	sRGB (CIE1976 area percentage/overlap)	138.2%/100%
	sRGB (CIE1931 area percentage/overlap)	146.2%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	118.4%/97.5%
	Adobe RGB (CIE1931 area percentage/overlap)	108.4%/94%
	DCI-P3 (CIE1976 area percentage/overlap)	110.1%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	107.8%/98.4%
	Rec.709 (CIE1976 area percentage/overlap)	138.2%/100%
	Rec.709 (CIE1931 area percentage/overlap)	146.2%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80.2%/80.2%
Rec.2020 (CIE1931 area percentage/overlap)	77.3%/77.3%	
Surface Treatment	Anti-Reflection	
Display Colors	1.07B	
Color bit	10 bits	
Ports E/S	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Alimentation	Power Type	Power Cable
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	50
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
Power Cord Type	C13	

Accessoires	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
	Switch Case	0
	Portable Screen Protection Case	0
	Monitor Hood	0
	Speaker (Accessories)	0
VESA Screw	4	
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
	Frameless Design	Yes
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	717 x 242 x 457
	Product Dimension without Stand (WxDxH) (mm)	717 x 72 x 419
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	9.1
	Weight Without Stand (kg)	6.4
Dimensions et poids (carton)	Inside Carton Dimension (WxDxH) (cm)	N/A
	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	11.4
Code-barre	EAN	4711377150255
Dimensions et poids	Weight (Net kg)	TBD
	Weight (Gross kg)	TBD
Dimensions du produit avec support (LxPxH)	Product Dimension with Stand (WxDxH) (mm)	717 x 242 x 457
Poids	Weight Without Stand (kg)	TBD