




MORE INFORMATION



MANUALS




All materials are compatible
with RoHS requirements

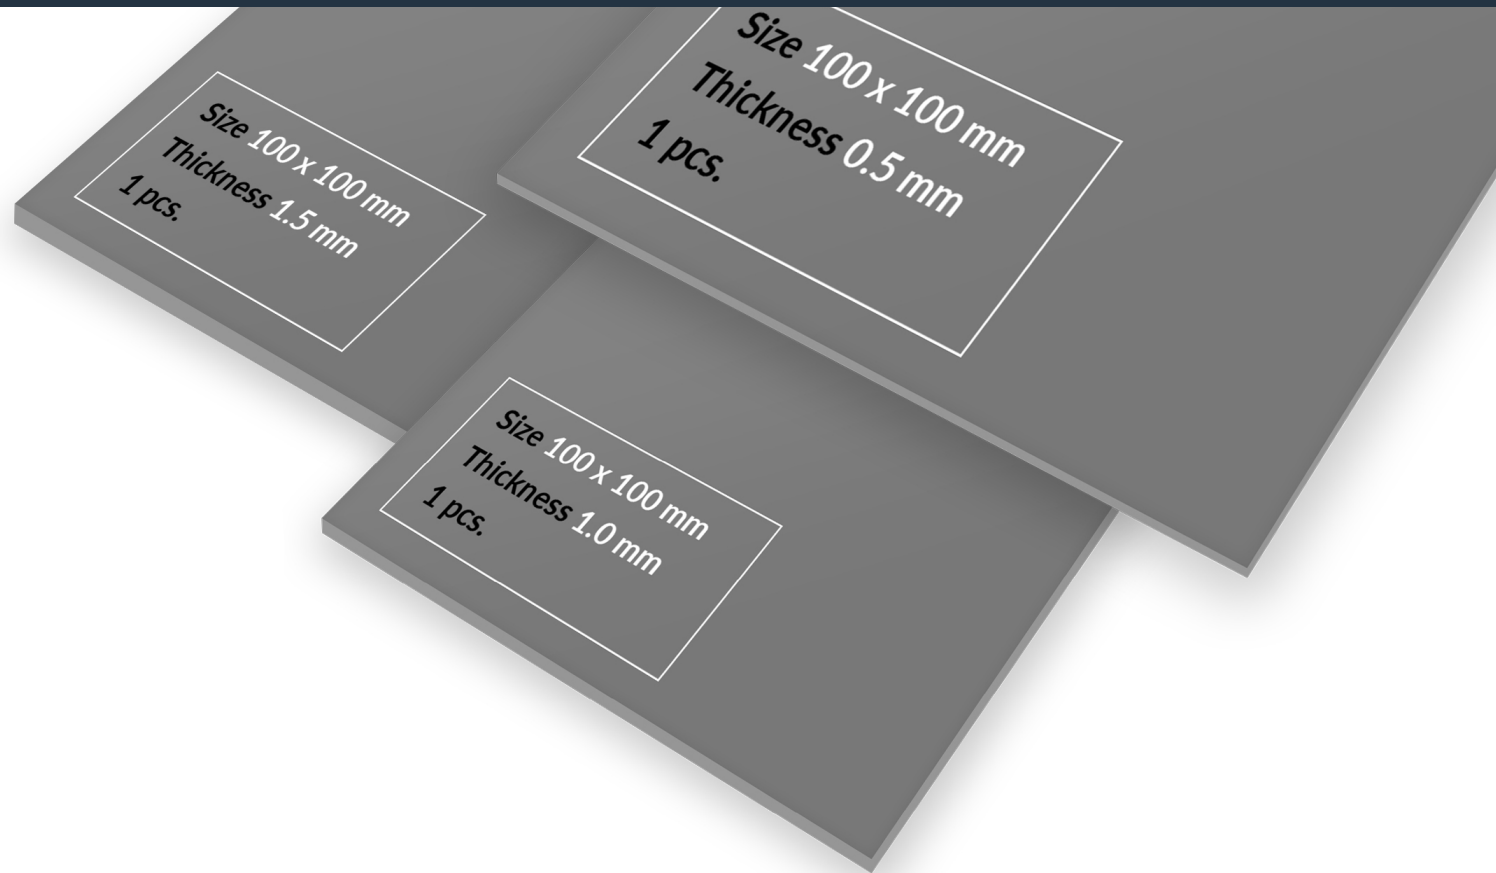

TP-4


Premium Performance Thermal Pad




100 x 100 mm | 0.5 mm




100 x 100 mm | 1.0 mm




100 x 100 mm | 1.5 mm



120 x 20 mm | 0.5 mm



120 x 20 mm | 1.0 mm



120 x 20 mm | 1.5 mm

Specifications	
General Specifications	
Colour	Grey
Hardness	50 Shore OO
Continuous Use Temperature	-40~150°C
Specific Gravity	3.4 g/cm ³
Compression Ratio	47 % @50 psi
Tensile Strength	1 psi
Breakdown Voltage	8.62 kV/mm
Dielectric Constant @1MHz	7.2 @ 1MHz
Volume Resistance	1.52 x 10 ¹² Ω-cm
Flammability	UL94 V-0

Shipping Information	
100 x 100, 0.5 mm	
Box Dimension	120 (L) x 115 (W) x 1.5 (H) mm
Gross Weight	31 g
SKU	ACTPD00062A
EAN	4895265001246
UPC	840033403917
100 x 100, 1.0 mm	
Box Dimension	120 (L) x 115 (W) x 2 (H) mm
Gross Weight	45 g
SKU	ACTPD00063A
EAN	4895265001253
UPC	840033403924
100 x 100, 1.5 mm	
Box Dimension	120 (L) x 115 (W) x 2.5 (H) mm
Gross Weight	54 g
SKU	ACTPD00064A
EAN	4895265001260
UPC	840033403931

Shipping Information	
120 x 20, 0.5 mm, 4 Pack	
Box Dimension	140 (L) x 95 (W) x 1.5 (H) mm
Gross Weight	29 g
SKU	ACTPD00065A
EAN	4895265001277
UPC	840033403948
120 x 20, 1.0 mm, 4 Pack	
Box Dimension	140 (L) x 95 (W) x 2 (H) mm
Gross Weight	43,5 g
SKU	ACTPD00066A
EAN	4895265001284
UPC	840033403955
120 x 20, 1.5 mm, 4 Pack	
Box Dimension	140 (L) x 95 (W) x 2.5 (H) mm
Gross Weight	61 g
SKU	ACTPD00067A
EAN	4895265001291
UPC	840033403962